

HARRIS LIGHT 20"


INSTALLATION INSTRUCTIONS

- 1 Wear Gloves! This will protect the finish on your light, so that it will patina evenly over time.
- 2 Unwrap all parts of light, including canopy and down-rod.
- 3 Screw the down-rod into the nozzle that is at the top of the shade.
- 4 Screw the knurled ring so that it moves off the hang-straight, downward toward the shade and slide it over the down-rod to the top of the shade.
- 5 With the lip of the canopy facing up, slip it over the hang-straight and onto the down-rod. Gently slide it all the way down to rest on the shade, being careful not to scratch the down-rod.
- 6 Thread the black and white wires through the pipe nipple that is attached to the crossbar (packaged separately in a clear bag), and screw the nipple into the hang-straight. A shorter nipple is included if needed.
- 7 Your light should now be ready to hang! Using a licensed electrician, install the light into the junction box.
- 8 Slide the canopy up the down-rod to the ceiling, followed by the knurled brass ring. Screw the ring onto the threading of the hang-straight until the canopy is secured against the ceiling.

KATY SKELTON™

+1 347 930 9363 | info@katyskelton.com | katyskelton.com

PROUDLY MADE TO ORDER IN SAVANNAH, GEORGIA

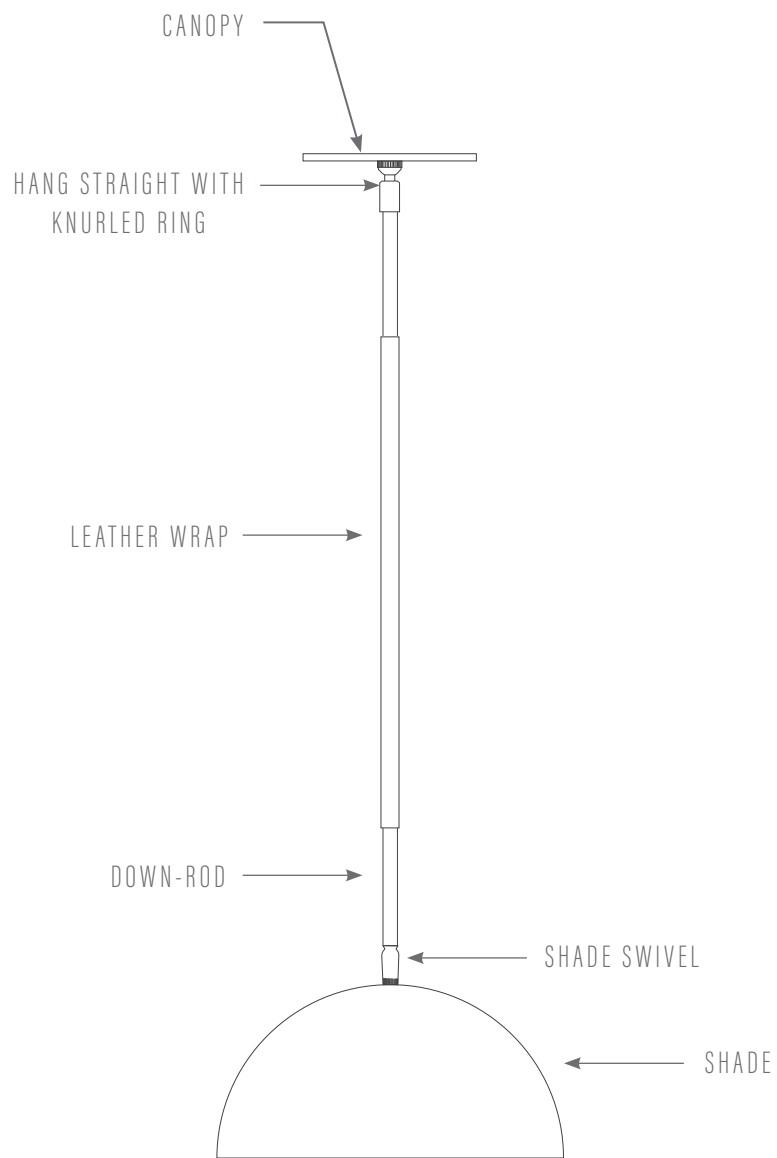

HARRIS LIGHT

INSTALLATION INSTRUCTIONS

- 1 Wear Gloves! This will protect the finish on your light, so that it will patina evenly over time.
- 2 Unwrap all parts of light, including canopy and down-rod.
- 3 Screw the down-rod into the nozzle that is at the top of the shade.
- 4 Screw the knurled ring so that it moves off the hang-straight, downward toward the shade and slide it over the down-rod to the top of the shade.
- 5 With the lip of the canopy facing up, slip it over the hang-straight and onto the down-rod. Gently slide it all the way down to rest on the shade, being careful not to scratch the down-rod.
- 6 Thread the black and white wires through the pipe nipple that is attached to the crossbar (packaged separately in a paper bag), and screw the nipple into the hang-straight. A shorter nipple is included if needed.
- 7 Your light should now be ready to hang! Using a licensed electrician, install the light into the junction box.
- 8 Slide the canopy up the down-rod to the ceiling, followed by the knurled brass ring. Screw the ring onto the threading of the hang-straight until the canopy is secured against the ceiling.

KATY SKELTON™

+1 347 930 9363 | info@katyskelton.com | katyskelton.com

PROUDLY MADE TO ORDER IN SAVANNAH, GEORGIA