


# LINEAR PENDANT

## INSTALLATION INSTRUCTIONS

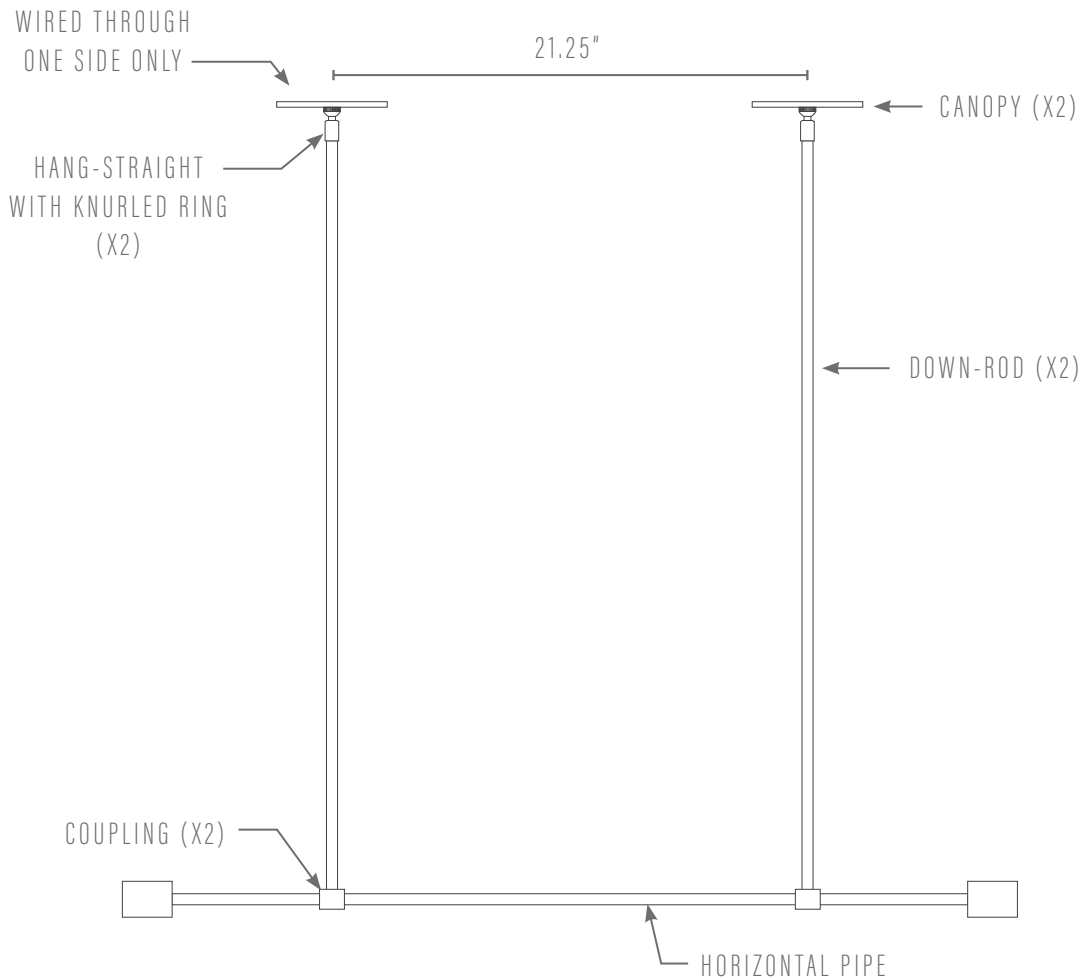

- 1 Wear Gloves! This will protect the finish on your light, so that it will patina evenly over time.
- 2 Unwrap all parts of light, including canopies and down-rods.
- 3 Screw one down-rod into each coupling on the horizontal pipe.
- 4 Screw the knurled ring so that it moves off the hang-straight, downward toward the horizontal pipe and slide it over the down-rod to rest on the horizontal pipe. Repeat this step for the second down-rod.
- 5 With the lip of the canopy facing up, slip it over the hang-straight and onto the down-rod. Gently slide it all the way down to rest on the horizontal pipe, being careful not to scratch the down-rod. Repeat for the second canopy.
- 6 Thread the black and white wires through the pipe nipple that is attached to the crossbar (packaged separately in a “hardware” bag), and screw the nipple into the hang-straight. A shorter nipple is included if needed. Repeat for the second crossbar.
- 7 Your light should now be ready to hang! With a licensed electrician, install the light into the junction box. The second canopy needs to be attached to the ceiling after the first is installed into the junction box.
- 8 Slide one canopy up the down-rod to the ceiling, followed by the knurled brass ring. Screw the ring onto the threading of the hang-straight until the canopy is secured against the ceiling. Repeat for the second canopy.

KATY SKELTON™

+1 347 930 9363 | [info@katyskelton.com](mailto:info@katyskelton.com) | [katyskelton.com](http://katyskelton.com)

PROUDLY MADE TO ORDER IN SAVANNAH, GEORGIA